




5SBM-8 5" SEALED BACK MIDRANGE


MECHANICAL DRAWING

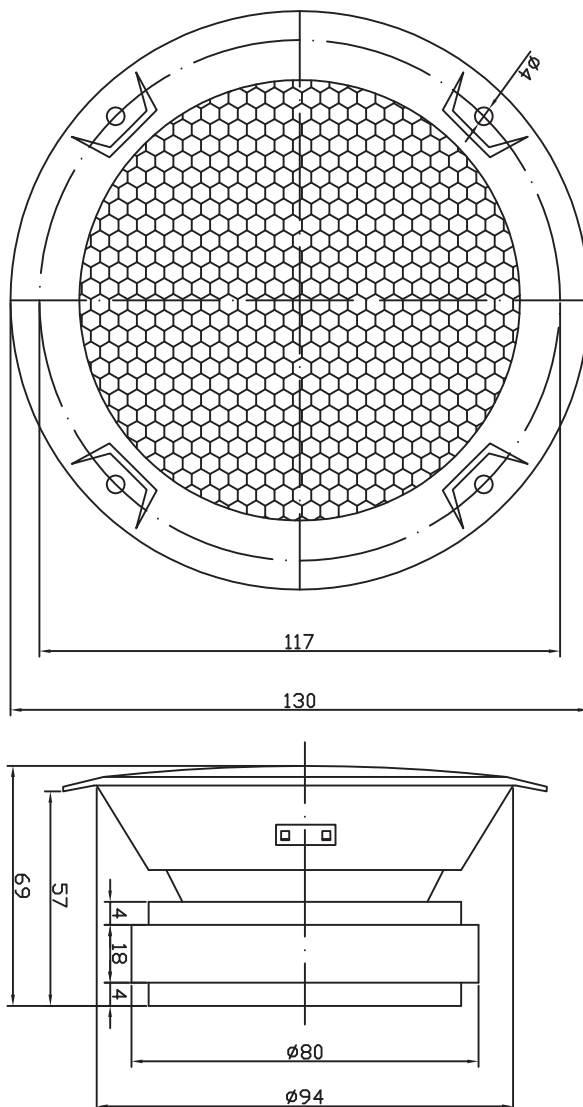

FEATURES

- Fully enclosed steel chassis does not require a separate enclosure
- Paper cone with paper surround for efficiency and extended range
- 12 oz. ferrite magnet provides superior motor strength and high power handling capacity
- Integral metal screen protects moving parts
- Great replacement speaker


IMPEDANCE/PHASE

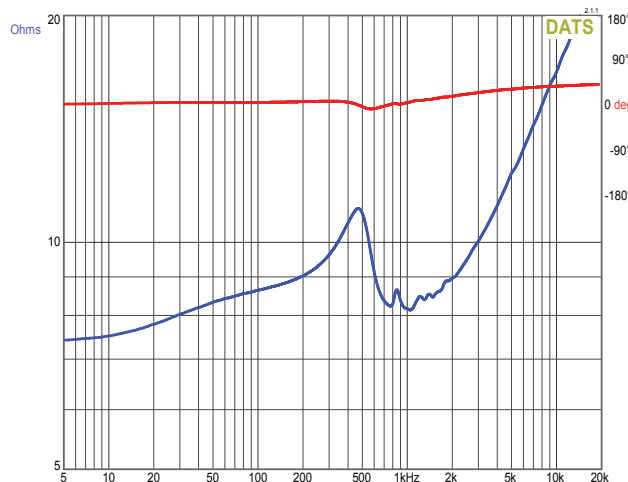

PARAMETERS

Impedance	8 ohms
Re	7.4 ohms
Le	0.6 mH
Fs	467 Hz
Qms	-
Qes	-
Qts	-
Mms	-
Cms	-
Sd	-
Vd	-
BL	-
Vas	-
Xmax	-
VC Diameter	19 mm
SPL	90 dB @ 2.83V/1m
RMS Power Handling (AES 426B)	30 watts
Usable Frequency Range (Hz)	600 - 10,000 Hz

FREQUENCY RESPONSE

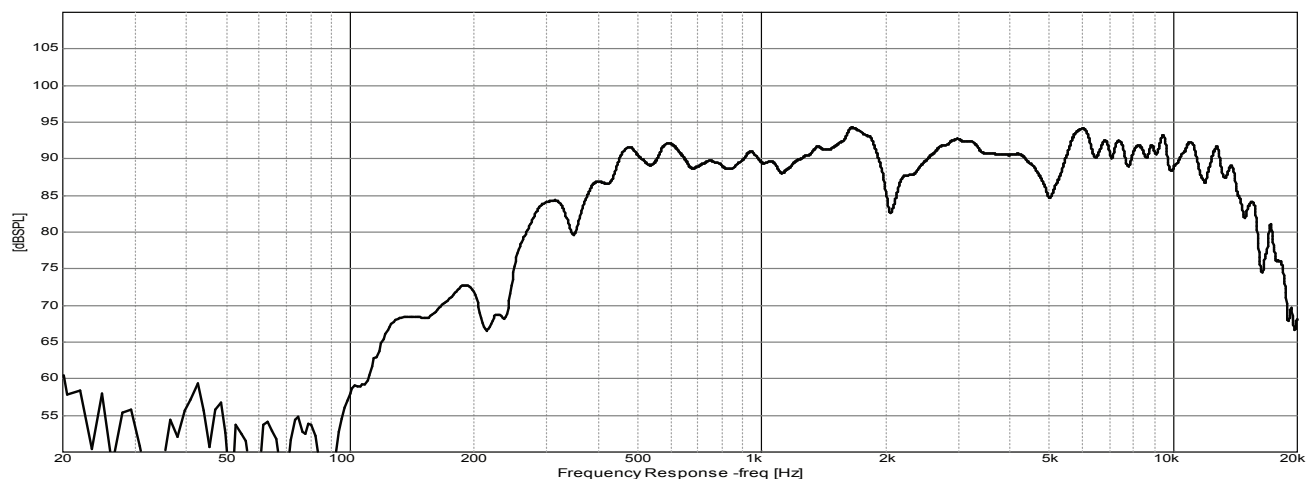

Note: 1/24th octave smoothing - nearfield response included in graph below 450 Hz.