


PHT-407

High Frequency Horn-Drivers



Features

- Small speaker horn driver
- 60 watts peak power handling
- Pure titanium-based 1.0" diaphragm diameter
- Ferrite magnetics

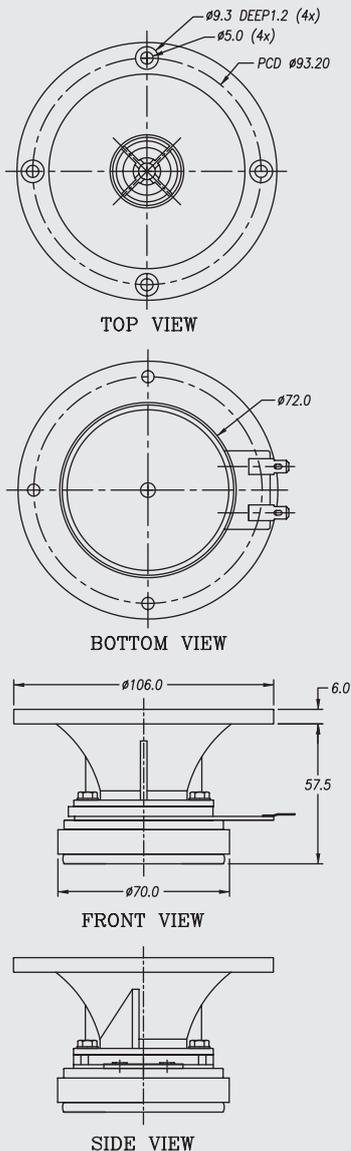


GENERAL SPECIFICATIONS

| | |
|-----------------------------------|-------------------------|
| Diaphragm diameter | 25.4 mm / 1 in |
| Power handling | 15 W |
| Impedance | 8 Ohm |
| Sensitivity (1w/1m) | 98 dB |
| Frequency range | 2000 - 20000 Hz |
| Cutoff frequency | 2000 Hz |
| Nominal coverage angle (HxV) -6dB | 60° Conical |
| Material | Injection polymer A.B.S |
| Magnet type | Ferrite |
| Diaphragm material | PEI (Polyimide Film) |
| Baffle cutout dimension | 75 mm 2.95 in |

SHIPPING INFORMATION

| | |
|---------------------|-------------------|
| Unit weight | 0.90 kg / 1.98 lb |
| Shipping Weight | 0.96 kg / 2.12 lb |
| Packaging dimension | 105x105x70 mm |
| WxDxH | 4.13x4.13x2.76 in |

Frequency response and Impedance curve

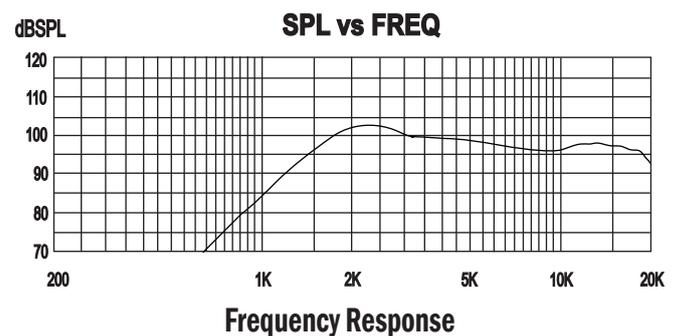

STH PROFESSIONAL AUDIO CO.,LTD.

AIA Sathorn Tower, unit 1607-1608, 16th floor, No.11/1, South Sathorn Road, Yannawa, Sathorn, Bangkok 10120