


PHT-409

High Frequency Horn-Drivers




Features


- Small speaker horn driver
- 60 watts peak power handling
- Polyimide film 1.0" diaphragm diameter
- Ferrite magnetics

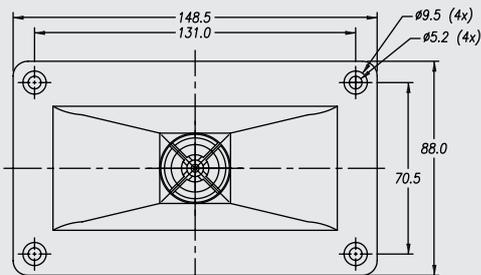


TOP VIEW

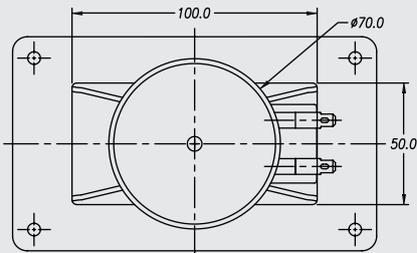

BOTTOM VIEW

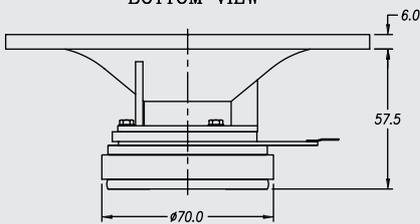

FRONT VIEW



SIDE VIEW


GENERAL SPECIFICATIONS

Diaphragm diameter	25.4 mm / 1 in
Power handling	15 W
Impedance	8 Ohm
Sensitivity (1w/1m)	100 dB
Frequency range	2000 - 20000 Hz
Cutoff frequency	2000 Hz
Nominal coverage angle (HxV) -6dB	100° x 40°
Material	Injection polymer A.B.S
Magnet type	Ferrite
Diaphragm material	PEI (Polyimide Film)
Baffle cutout dimension	50x100 mm 1.97x3.94 in

SHIPPING INFORMATION

Unit weight	0.50 kg / 1.10 lb
Shipping Weight	0.56 kg / 1.23 lb
Packaging dimension	150x90x70 mm
WxDxH	5.91x3.54x2.76 in

Frequency response and Impedance curve

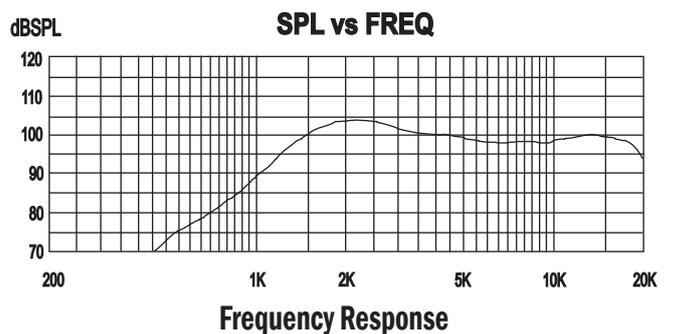

STH PROFESSIONAL AUDIO CO.,LTD.

AIA Sathorn Tower, unit 1607-1608, 16th floor, No.11/1, South Sathorn Road, Yannawa, Sathorn, Bangkok 10120