



PHT-413

High Frequency Horn-Drivers

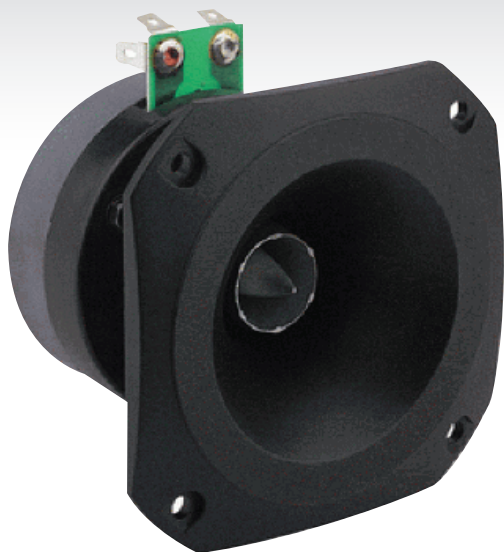


Features


- Small speaker horn driver
- 80 watts peak power handling
- Phenolic resin 1.0" diaphragm diameter
- Ferrite magnetics

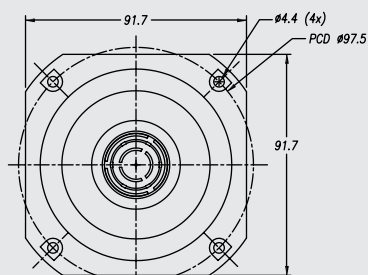


TOP VIEW



BOTTOM VIEW



FORNT VIEW



SIDE VIEW


GENERAL SPECIFICATIONS

Diaphragm diameter	25.4 mm / 1 in
Power handling	20 W
Impedance	8 Ohm
Sensitivity (1w/1m)	105 dB
Frequency range	2000 - 20000 Hz
Cutoff frequency	2000 Hz
Nominal coverage angle (HxV) -6dB	
Material	Injection polymer A.B.S
Magnet type	Ferrite
Diaphragm material	Phenolic Resin
Baffle cutout dimension	75 mm
	2.95 in

SHIPPING INFORMATION

Unit weight	0.69 kg / 1.52 lb
Shipping Weight	0.80 kg / 1.76 lb
Packaging dimension	100x100x90 mm
WxDxH	3.94x3.94x3.54 in

Frequency response and Impedance curve

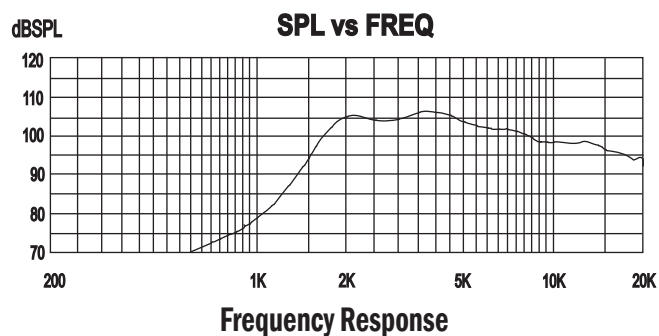

STH PROFESSIONAL AUDIO CO.,LTD.

AIA Sathorn Tower, unit 1607-1608, 16th floor, No.11/1, South Sathorn Road, Yannawa, Sathorn, Bangkok 10120